

(19) World Intellectual Property  
Organization  
International Bureau




(43) International Publication Date  
13 May 2004 (13.05.2004)

PCT

(10) International Publication Number  
**WO 2004/040182 A1**

- (51) International Patent Classification<sup>7</sup>: **F16L 1/23**, B65H 51/14, H02G 1/06, E21B 19/22
- (21) International Application Number: PCT/GB2003/004697
- (22) International Filing Date: 31 October 2003 (31.10.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 0225496.9 1 November 2002 (01.11.2002) GB
- (71) Applicant (for all designated States except US): **THE ENGINEERING BUSINESS LIMITED** [GB/GB]; Broomhaugh House, Riding Mill, Northumberland NE44 6EG (GB).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): **GRINSTED, Timothy, William** [GB/GB]; Beaumont House, Stocksfield, Northumberland NE43 7TN (GB).
- (74) Agent: **HARRISON GODDARD FOOTE**; Belgrave Hall, Belgrave Street, Leeds LS2 8DD (GB).
- (81) Designated States (national): AE, AG, AI, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (regional): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IL, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).
- Published:**  
— with international search report  
— before the expiration of the time limit for amending the claims and to be republished in the event of receipt of amendments
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: LONGITUDINAL LOAD VARYING DEVICE FOR ELONGATE MEMBERS



(57) Abstract: A tensioner for deploying a member such as a pipe or cable, such as a sub-sea cable deployed from a ship, comprises an endless track and drive means for driving the track. The track includes a plurality of traction elements mounted thereon for movement with the track. Each traction element includes one or more cushions for supporting the member, and a pair of opposed arms mounted on respective sides of the base of the traction element. One or more of the arms is pivotally mounted for movement between a clamping position and a release position. In an alternative arrangement, four moveable arms are linked in diametrically opposite pairs to move between a release position and a clamping position. Cushions on the arms clamp the member in conjunction with the cushions of the traction element, when the arms are in the clamping position. Guide means are provided to urge the arms into the clamping position to grip the member as it passes through the tensioner.

### Longitudinal Load Varying Device for Elongate Members

The present invention relates to apparatus for gripping an elongate member and  
5 applying a continuous longitudinal load to the member while allowing the member to  
move in a controlled manner through the apparatus.

More specifically, the present invention relates to tensioners for pipes and/or cables,  
in particular for laying pipes or cables offshore, and especially (but not exclusively)  
10 to such tensioners for use with so-called Integrated Service Umbilicals (ISUs).

Tensioners as such are known in the art and are used to grip pipes or cables as they  
are deployed from a ship to the sea bed during offshore installation. The tensioners  
maintain a constant tension in the pipe or cable (hereinafter "member") as it is  
15 deployed over the side of the vessel. Conventional tensioners consist of a number of  
traction devices having a track, each track comprising a number of contacting  
elements arranged on a continuous belt or loop. The track is driven so that as the  
contacting elements move with the belt or loop they move along a path or section in  
which contacting surfaces the contacting elements bear against the member and so  
20 control the passage of the pipe or cable through the tensioner. Typically two, three or  
four tracks are provided arranged equidistantly around the member. Providing a  
higher number of tracks (for example four rather than two) achieves a more even  
distribution of the loading on the member gripped by the tensioner and, for a given  
coefficient of friction between the tensioner and the member reduces the length over  
25 which the member has to be gripped in order to achieve a desirably low tensile force.

ISUs are relatively stiff but delicate "cables" which consist of a number of elements  
such as hoses, power cables and signal cables in a single package, generally of  
circular cross section. ISUs cannot withstand high clamping loads which are  
30 conventionally applied when laying pipes for example. In order to avoid such high  
clamping loads, ISUs require very long pipe tensioning machines (even where four

tracks are provided) to provide the required grip on the ISU while providing sufficiently high hold-back tension (typically of the order of 60 tonnes) which is necessary for laying cable from a ship into very deep water.

- 5 Conventional traction devices are arranged so that the clamping forces on the member are reacted by the traction devices themselves, opposing traction devices being urged by hydraulic or mechanical means onto the member to provide the gripping force. The traction devices are thus required to resist both the tensile force resulting from the laying of the member and the gripping forces normal to the
- 10 longitudinal axis of the member. This necessarily means that each traction device is relatively large and heavy and this problem is multiplied where higher numbers of traction devices are needed.

- The present invention seeks to provide a tensioner in which the forces which traction
- 15 devices must resist are minimised, so contributing to a reduction in the size of the tensioner and further to provide a gripping arrangement for a tensioner which reduces the required number of traction devices.

- According to a first aspect of the invention there is provided a tensioner for
- 20 deploying an elongate member comprising:

- i) an endless track including a plurality of traction elements, each traction element comprising a base unit including at least a first gripping surface and first moveable arm and a second arm each including a further gripping surface, the arms being mounted at respective sides of the traction element
- 25 and the first arm being operatively moveable about a pivot axis between a first position in which the further gripping surface of said first arm is spaced from the member and a second position in which said further gripping surface of said first arm can contact the member;
- ii) drive means for driving the track so that the traction elements move along an
- 30 endless path, said endless path including a path segment along which said first gripping surfaces operatively contact the member;

- iii) first guide means which operatively co-operates with the first arm to urge the first arm from said first position to said second position such that the first arm maintains said second position as the traction elements move along said path segment; and
  - 5 iv) second guide means which operatively co-operates with said second arm to form, in said path segment, a reaction surface for a reaction force substantially normal to said surface and to the longitudinal axis of the member.
- 10 In a much preferred embodiment of this aspect of the invention, the second arm is also operatively moveable about a pivot axis between a first position in which the further gripping surface of said second arm is spaced from the member and a second position in which said further gripping surface of said second arm can contact the member and said second guide means operatively co-operates with the second arm to
- 15 urge the second arm from said first position to said second position such that the second arm maintains said second position as the traction elements move along said path segment.

- Preferably in said path segment, the pivot axis of the or each arm is operatively
- 20 substantially aligned with the longitudinal axis of the member.

- Where only the first arm is moveable, preferably the first guide means presents a guide surface operatively co-operating with a contacting surface of the first arm, the guide surface extending generally longitudinally with respect to the member and
- 25 being so shaped in a portion preceding said path segment to move said first arm from the first position to the second position and in a portion succeeding said path section to allow the first arm to move from said second position to said first position.

- Where both the first and second arms are moveable, preferably the guide means
- 30 present respective first and second guide surfaces operatively co-operating with a contacting surface of said respective arms, the guide surfaces extending generally

longitudinally with respect to the member and being so shaped in a portion preceding said path segment to move said arms from the first position to the second position and in a portion succeeding said path section to allow the arms to move from said second position to said first position.

5

Preferably the first and second guide surfaces are defined on first and second guide rails.

In a preferred embodiment of this aspect of the invention the contacting surfaces of the or each arm comprises a surface of a roller mounted on the arm for rotation about an axis substantially perpendicular to the pivot axis of the first arm.

In another preferred embodiment of this aspect of the invention, the base unit comprises two first gripping surfaces such that when the arms are in their second position the four gripping surfaces are equidistantly spaced.

15

According to a second aspect of the present invention there is provided a tensioner for deploying an elongate member comprising:

- i) an endless track including a plurality of traction elements, each traction element comprising:
  - (a) a base unit;
  - (b) first and second arms mounted at respective opposite sides of the traction element and each including a gripping surface operatively disposed above the longitudinal axis of the member; and
  - (c) third and fourth arms also mounted at respective opposite sides of the traction element and each including a gripping portion operatively disposed below the longitudinal axis of the member, each said arm being operatively moveable about a pivot axis between a first position in which the gripping surfaces are spaced from the member and a second position in which the gripping surfaces can contact the member;

20

25

30

- ii) drive means for driving the track so that the traction elements move along an endless path, said endless path including a path segment along which said gripping surfaces operatively contact the member;
- iii) guide means which operatively co-operates with the first and second arms to urge the first and second arms from said first position to said second position such that the first and second arms maintain said second position as the traction elements move along said path segment; and
- iv) a first linkage connecting the first arm and the fourth arm and a second linkage connecting the second arm and the third arm such that movement of the first and second arms between their first and second positions causes a corresponding movement of the third and fourth arms between their first and second positions.

Preferably, in said path segment, the pivot axes of the arms are operatively substantially aligned with the longitudinal axis of the member.

In a much preferred arrangement, respectively the first and third arms and the second and fourth arms pivot about a common axis.

In a further preferred arrangement, the common axes of the first and third and second and fourth arms, and the longitudinal axis of the member operatively lie in the same plane.

In a preferred embodiment of the second aspect of the invention, the first and third arms each include an extension portion extending below their pivot axis, and the first and second linkages comprises a link arm which is pivotally attached at a first end to a lower region of the extension portion of the respective first or second arm and which is pivotally attached at a second end to a lower portion of the third or fourth arm.

Preferably the guide means present respective first and second guide surfaces operatively co-operating with a contacting surface of said first and second arms, the guide surfaces extending generally longitudinally with respect to the member and being so shaped in a portion preceding said path segment to move said arms from the

5 first position to the second position and in a portion succeeding said path section to allow the arms to move from said second position to said first position. The first and second surfaces are preferably defined on first and second guide rails.

In a preferred embodiment of this aspect of the invention the contacting surfaces of

10 the first and second arms comprise a surface of a roller mounted on the arm for rotation about an axis substantially perpendicular to the pivot axis of the arm

In a much preferred arrangement of this aspect of the invention the gripping surfaces of the arms are, in use, equidistantly spaced about the circumference of the member

15 in their second position.

In a preferred embodiment of the first and second aspects of the invention, the endless track comprises first and second track belts operatively driven in unison and wherein each traction element includes first and second attachment wings extending

20 laterally from the base unit and fixedly mounted on a respective track belt.

For a better understanding of the invention and to show how the same may be carried into effect, reference will be made, by way of example only, to the following

25 drawings in which:

Figure 1 is a perspective view of one example of a tensioner according to the invention;

30 Figure 2 is a more detailed view of an end portion of the tensioner of Figure 1;

Figure 3 is an end view of the tensioner of Figure 1 and 2;

Figure 4 is a plan view of a traction element of the tensioner of Figure 1;

5 Figure 5 is a perspective view of the traction element of Figure 4;

Figure 6 is a diagram schematically illustrating forces acting on a typical prior art tensioner;

10 Figure 7 is a diagram schematically illustrating the absence of corresponding forces on the tensioner according to the invention;

Figure 8 is an end view of a traction element of the second aspect of the invention in a gripping condition;

15

Figure 9 is a view similar to Figure 8 with the traction element in a released condition; and

Figure 10 is a view similar to Figure 9 of a partially disassembled traction element.

20

Referring now to Figures 1 to 5, the tensioner 1 is mounted in a frame 3 and comprises an endless track 5 consisting of two parallel track belts 5a and 5b which are driven by suitable drive means (not specifically illustrated). Mounted on the respective track belts 5a, 5b is a number of spaced traction elements 7. Each traction

25 element 7 includes a pair of lateral wings 9 by means of which it is attached to a respective track belt 5a, 5b for movement with the track belt. The track 5 is mounted and driven so that the traction elements 7 describe a path in the form of an endless loop. The path includes a path segment 11 in which the path is essentially straight and aligned with the longitudinal axis 13 of the member (pipe or cable or ISU etc)

30 15.



Each traction element 7 is essentially similar and consists of a base unit 17 on which are mounted pads or cushions 19 which define gripping surfaces 21 which contact the member in use. The two lateral wings 9 depend from the respective sides of the base unit 17 and may be formed integrally therewith. At either side of the base unit 17 are mounted arms 23a and 23b. On each arm is mounted a pad or cushion 25 which is generally similar to the pads or cushions 19 and which defines a further gripping surface 27a, 27b. The arms 23 are mounted on the base unit so that they can rotate with respect to the base unit 17 about axes 29a and 29b. The axes 29a and 29b are parallel to the longitudinal axis of the member 15 when the member is retained in the tensioner 1. The rotation of the arms 23a, 23b about the axes 29a, 29b allows the arms 23a, 23b to move between a clamping position in which the member 15 is gripped by the further gripping surfaces 27a, 27b (in combination with the gripping surfaces 21 of the base unit 17) and a release position in which the further gripping surfaces 27a, 27b are spaced from the member. Figures 4 and 5 specifically illustrate the clamping and release positions of arms 23a and 23b. In these Figures, the arm 23a is shown in the clamping position and the arm 23b is shown in the release position. (NB: the positions of the arms as shown are for the purposes of illustration and explanation only. In normal use, the arms will move in tandem so that both are in the clamping position or both are in the release position).

In order to move the arms 23a, 23b from the release position to the clamping position, guide means 31 are provided which in the illustrated embodiment takes the form of a guide bar or rail 33. In Figures 1, 2 and 3 the guide rail for the arms 23b is omitted for reasons of clarity. The guide rails 33 are arranged generally parallel to the longitudinal axis of the member 15 as it passes through the tensioner and present a smooth guide surface 35 which contacts the arms 23a, 23b. The guide surface includes a curved entrance portion which guides the arms 23a, 23b from the release position to the clamping position and a correspondingly curved exit portion which allows the arms 23a, 23b to move from the clamping position to the release position. Between the entrance and exit portions, the guide surface comprises a straight portion which is aligned with the longitudinal axis of the member 15 and which maintains

the arms 23a, 23b in the clamping position. The straight portion corresponds to and is generally co-extensive with the path segment 11 of the track 5 which segment is essentially straight and aligned with the longitudinal axis 13 of the member 15. The size of the base unit 17 and the arms 23a, 23b, the spacing of the pads or cushions 19, 25 and the position and spacing of the guide rails 33 are all selected in accordance with the size of the member 15 to be deployed and the clamping force which is required.

In the illustrated embodiment, the arms 23a, 23b are provided with rollers 37 for co-operating with the guide surface 25. The rollers are mounted on the ends of the arms 23a, 23b distal from the base unit 17 and rotate about an axis which is normal to the pivot axes 29 of the arms.

In use of the tensioner 1, the track 5 is driven in the forward or reverse direction as appropriate to move the traction elements 7. The member 15 is fed into the tensioner 1 so that it is accommodated on pads or cushions 19 of base units 17 entering and passing through the path segment 11. As successive traction elements approach the path segment 11, the guide rails 33 move the arms 23a, 23b from the release position to the clamping position so that in the path segment 11 the member is clamped by the pads or cushions 19 in combination with the arm pads or cushions 25. The pads or cushions 19, 25 are so disposed that, with the arms 23a, 23b in the clamping position, the pads or cushions 19, 25 are equidistantly spaced about the circumference of the member 15. At the end of the path segment 11, the guide rails 33 release the arms 23a, 23b. Thus, with the member clamped by the pads or cushions 19, 25 in the path segment 11, movement of the member 15 is controlled by the tensioner 1 so that the member can be paid out or deployed, such as in sub-sea cable laying, at an appropriate tension.

Referring now to Figures 8 to 10 which illustrate a traction element 107 for a tensioner according to a second aspect of the invention, the traction element is mounted on a track 5 (not shown) by means of a pair of lateral wings 109 which

depend from respective sides of a base unit 117 and may be formed integrally therewith. First, second third and fourth arms 123a, 123b, 123c and 123d are mounted on the base unit for movement about pivot axes 129a, 129b. The first and second arms 123a, 123b are essentially similar to one another and the third and fourth  
5 arms 123b, 123d are essentially similar to one another. The first and third arms 123a, 123c are mounted on one side of the base unit 117 and the second and fourth arms 123b, 123d are mounted on a second, opposite, side of the base unit 117. The first and third arms 123a, 123c pivot about a first pivot axis 129a and the second and fourth arms 123b, 123d pivot about a second pivot axis 129b.

10

Each of the four arms 123a, 123b, 123c and 123d is provided with a pad or cushion 125 which defines a gripping surface 127 for the member 15. The pad or cushion 125 of the first and second arms 123a, 123b is disposed on an upper part 122a, 122b of the arm, above the longitudinal axis 13 of the member 15. The third and fourth  
15 arms 123c, 123d extend in use principally below the longitudinal axis 13 so that the pads or cushions of these arms are disposed below the longitudinal axis 13.

The first and second arms 123a, 123b comprise a roller 137 which co-operates with guide rails in an analogous manner to the first aspect of the invention to move the  
20 first and second arms 123a, 123b from a first (released) condition (Figure 9) to a second (gripping) condition (Figure 8). As can best be seen from Figure 10 (which shows the second and third arms only), the second arm 123b includes a lower portion 124b which extends below the pivot axis 129b. First arm 123a includes a corresponding lower portion 124a extending below pivot axis 129a. A link arm 139b  
25 extends between the lower portion 124c of second arm 123b and a lower part of third arm 123c and is pivotally attached to the third and second arms 123c, 123b at its respective ends 139' and 139". A corresponding link arm 139a links first arm 123a and fourth arm 123d. The link arms provide that as the first and second arms 123a, 123b arm moved by the guide rail from the first (released) position to the second  
30 (gripping) position, the third and fourth arms 123c, 123d also move from a release position to a gripping position. In this way, members 15 of differing sizes can be

accommodated by the tensioner, with the gripping surfaces 127 remaining centred about the axis 13 of the member 15. That is, relative location of the member axis 13 with respect to the track 5 is independent of the member diameter.

- A particular advantage of the construction according to the present invention is that the normal gripping forces are isolated from the traction device, allowing the tensioner to be driven by a single traction device. In the prior art designs, drive means are required for each track of the tensioner. Furthermore, in the construction according to the present invention the forces that individual traction devices are required to resist are minimised. In particular, the construction according to the present invention aligns the longitudinal force on the member 15 with the line of action of the reacting force of the traction device to minimise the resultant couples applied to the traction elements. This can be seen in particular by comparison of Figures 6 and 7. In the prior art device of Figure 6, a force  $F_1$  exerted by the member 15 is reacted by reaction force  $F_2$  at the traction elements 7 of tracks 5' (tracks 5' are shown in part only). Thus the traction elements 7' are subject to a couple equal to  $(F_2/2)d$ . This couple tends to tilt or skew the contact surfaces between the traction elements and the member, so reducing the contact area. As can be seen from Figure 7, in the construction according to the invention, the force  $F_P$  exerted by the member 15 is reacted by reaction force  $F_R$  and there is no resulting couple.

20

## Claims

1. A tensioner for deploying an elongate member comprising:
  - i) an endless track including a plurality of traction elements, each traction  
5 element comprising a base unit including at least a first gripping surface and first moveable arm and a second arm each including a further gripping surface, the arms being mounted at respective sides of the traction element and the first arm being operatively moveable about a pivot axis between a first position in which the further gripping surface of said first arm is spaced  
10 from the member and a second position in which said further gripping surface of said first arm can contact the member;
  - ii) drive means for driving the track so that the traction elements move along an endless path, said endless path including a path segment along which said first gripping surfaces operatively contact the member;
  - 15 iii) first guide means which operatively co-operates with the first arm to urge the first arm from said first position to said second position such that the first arm maintains said second position as the traction elements move along said path segment; and
  - iv) second guide means which operatively co-operates with said second arm to  
20 form, in said path segment, a reaction surface for a reaction force substantially normal to said surface and to the longitudinal axis of the member.
2. A tensioner as claimed in claim 1 wherein the second arm is also operatively  
25 moveable about a pivot axis between a first position in which the further gripping surface of said second arm is spaced from the member and a second position in which said further gripping surface of said second arm can contact the member and said second guide means operatively co-operates with the second arm to urge the second arm from said first position to said second position such that the  
30 second arm maintains said second position as the traction elements move along said path segment.

3. A tensioner as claimed in claim 1 or 2 wherein in said path segment, the pivot axis of the or each arm is operatively substantially aligned with the longitudinal axis of the member.
- 5
4. A tensioner as claimed in claim 1 or claim 3 when dependent on claim 1 wherein the first guide means presents a guide surface operatively co-operating with a contacting surface of the first arm, the guide surface extending generally longitudinally with respect to the member and being so shaped in a portion
- 10 preceding said path segment to move said first arm from the first position to the second position and in a portion succeeding said path section to allow the first arm to move from said second position to said first position.
5. A tensioner as claimed in claim 2 or claim 3 when dependent on claim 2 wherein
- 15 the guide means present respective first and second guide surfaces operatively co-operating with a contacting surface of said respective arms, the guide surfaces extending generally longitudinally with respect to the member and being so shaped in a portion preceding said path segment to move said arms from the first position to the second position and in a portion succeeding said path section to
- 20 allow the arms to move from said second position to said first position.
6. A tensioner as claimed in claim 5 wherein the first and second guide surfaces are defined on first and second guide rails.
- 25 7. A tensioner as claimed in any of claims 4 to 6 wherein the contacting surfaces of the or each arm comprises a surface of a roller mounted on the arm for rotation about an axis substantially perpendicular to the pivot axis of the first arm.
- 30 8. A tensioner as claimed in any preceding claim wherein the base unit comprises two first gripping surfaces such that when the arms are in their second position the four gripping surfaces are equidistantly spaced.

9. A tensioner for deploying an elongate member comprising:
- i) an endless track including a plurality of traction elements, each traction element comprising:
    - 5 (a) a base unit;
    - (b) first and second arms mounted at respective opposite sides of the traction element and each including a gripping surface operatively disposed above the longitudinal axis of the member; and
    - (c) third and fourth arms also mounted at respective opposite sides of the traction
- 10 element and each including a gripping portion operatively disposed below the longitudinal axis of the member,
- each said arm being operatively moveable about a pivot axis between a first position in which the gripping surfaces are spaced from the member and a second position in which the gripping surfaces can contact the member;
- 15 ii) drive means for driving the track so that the traction elements move along an endless path, said endless path including a path segment along which said gripping surfaces operatively contact the member;
  - iii) guide means which operatively co-operates with the first and second arms to urge the first and second arms from said first position to said second position
- 20 such that the first and second arms maintain said second position as the traction elements move along said path segment; and
- iv) a first linkage connecting the first arm and the fourth arm and a second linkage connecting the second arm and the third arm such that movement of the first and second arms between their first and second positions causes a
- 25 corresponding movement of the third and fourth arms between their first and second positions.
10. A tensioner as claimed in claim 9 wherein in said path segment, the pivot axes of the arms are operatively substantially aligned with the longitudinal axis of the
- 30 member.

11. A tensioner as claimed in claim 9 or 10 wherein respectively the first and third arms and the second and fourth arms pivot about a common axis.
12. A tensioner as claimed in claim 11 wherein the common axes of the first and  
5 third and second and fourth arms, and the longitudinal axis of the member operatively lie in the same plane.
13. A tensioner as claimed in any of claims 9 to 12 wherein the first and third arms each include an extension portion extending below their pivot axis, and the first  
10 and second linkages comprises a link arm which is pivotally attached at a first end to a lower region of the extension portion of the respective first or second arm and which is pivotally attached at a second end to a lower portion of the third or fourth arm.
14. A tensioner as claimed in any of claims 9 to 13 wherein the guide means present  
15 respective first and second guide surfaces operatively co-operating with a contacting surface of said first and second arms, the guide surfaces extending generally longitudinally with respect to the member and being so shaped in a portion preceding said path segment to move said arms from the first position to  
20 the second position and in a portion succeeding said path section to allow the arms to move from said second position to said first position.
15. A tensioner as claimed in claim 14 wherein the first and second guide surfaces are defined on first and second guide rails.
- 25 16. A tensioner as claimed in any of claims 14 or 15 wherein the contacting surfaces of the first and second arms comprise a surface of a roller mounted on the arm for rotation about an axis substantially perpendicular to the pivot axis of the arm



17. A tensioner as claimed in any of claims 9 to 16 wherein the gripping surfaces of the arms are, in use, equidistantly spaced about the circumference of the member in their second position.
- 5 18. A tensioner as claimed in any preceding claim wherein the endless track comprises first and second track belts operatively driven in unison and wherein each traction element includes first and second attachment wings extending laterally from the base unit and fixedly mounted on a respective track belt.
- 10 19. A tensioner as hereinbefore described with reference to any of Figures 1 to 8.

1/4

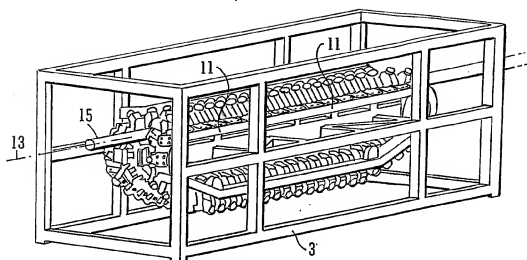


FIG. 1

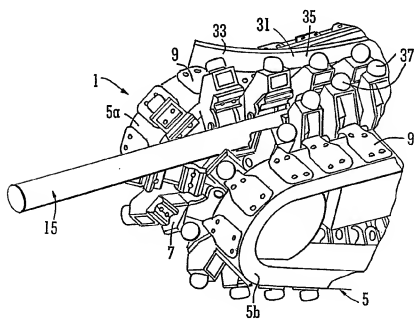


FIG. 2

2/4




FIG. 3




FIG. 4




FIG. 5

3/4

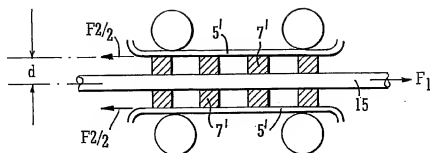


FIG. 6




FIG. 7

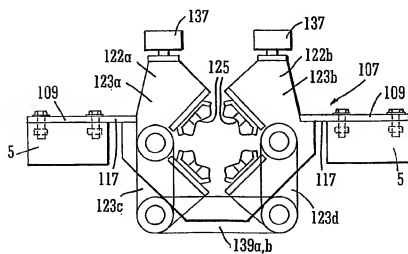


FIG. 8

4/4

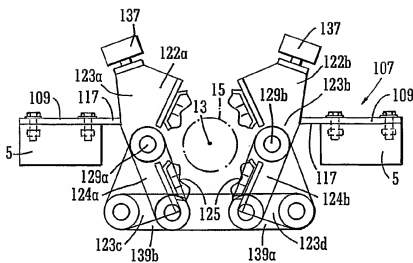


FIG 9

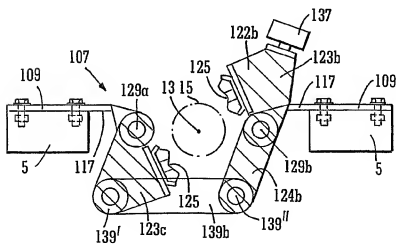


FIG. 10

## INTERNATIONAL SEARCH REPORT

PCT/GB 03/04697

## A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 F16L1/23 B65H51/14 H02G1/06 E21B19/22

According to International Patent Classification (IPC) or to both national classification and IPC

## B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 F16L B65H H02G E21B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal

## C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 3 638 288 A (PRYOR DALE H) 1 February 1972 (1972-02-01) column 2, line 3 - column 2, line 57; figures 3,4 -----	1,9
A	EP 0 524 648 A (HYDRA RIG INC) 27 January 1993 (1993-01-27) column 8, line 49 - column 9, line 43; figures 3-9 -----	1,9
A	US 3 216 639 A (ANDRE CASTELA) 9 November 1965 (1965-11-09) the whole document -----	1,9

☐ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

## \* Special categories of cited documents:

\*A\* document defining the general state of the art which is not considered to be of particular relevance

\*E\* earlier document but published on or after the international filing date

\*L\* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

\*C\* document referring to an oral disclosure, use, exhibition or other means

\*P\* document published prior to the international filing date but later than the priority date claimed

\*T\* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

\*X\* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

\*Y\* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

\*S\* document member of the same patent family

Date of the actual completion of the international search

14 Apr11 2004

Date of making of the international search report

22/04/2004

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patenlistan 2  
NL - 2280 HV Rijswijk  
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,  
Fax: (+31-70) 340-3016

Authorized officer

Donnelly, C

## INTERNATIONAL SEARCH REPORT

PCT/GB 03/04697

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 3638288	A	01-02-1972	NONE	
EP 0524648	A	27-01-1993	US 5309990 A	10-05-1994
			CA 2074384 A1	27-01-1993
			DE 69220299 D1	17-07-1997
			DE 69220299 T2	22-01-1998
			EP 0524648 A2	27-01-1993
US 3216639	A	09-11-1965	FR 1418760 A	26-11-1965
			DE 1177094 B	03-09-1964
			GB 1034525 A	29-06-1966
			NL 291713 A	
			OA 1594 A	20-09-1969